



ULTRATECH
INTERNATIONAL, INC.

How To Use The Ultra-Drain Seal®

Protective cover for drains, grates and manholes against accidental spills.

Follow these easy steps to assure maximum effectiveness:

1. Make sure the Ultra-Drain Seal® is the correct size.

For best results, use a Ultra-Drain Seal® which is 6" larger than the outside of the grate.

2. Apply the Ultra-Drain Seal®.


- A. Remove all stones, branches, or other debris off the object you desire to cover.
- B. Remove the plastic film from the Ultra-Drain Seal® and remember to keep it to re-apply before storage.
- C. Place the Ultra-Drain Seal® over the drain, grate, or manhole you desire to seal.
- D. To gain a faster seal you may step on the DrainSeal®. Never attempt this after spill has reached the drain.

3. Always decontaminate the Ultra-Drain Seal® before reuse or storage.

- A. Wash the Ultra-Drain Seal® and its plastic film in warm water with a non-abrasive detergent or petroleum solvent cleaner.
- B. Dry both the Drain Seal® and plastic film with a cloth and re-apply the plastic film to the Drain Seal®.
- C. Using the tube provided, roll up the Drain Seal® and place it back into the box for storage.
- D. Store the Ultra-Drain Seal® out of direct sunlight, and at room temperature.

IMPORTANT NOTES:

- Never allow the Ultra-Drain Seal® to touch itself for long periods of time.
- The Ultra-Drain Seal® will become less flexible if stored in cold temperatures.
- Due to the nature of softer urethane, the physical properties of these products may change with exposure to certain environmental conditions like temperature, humidity and UV radiation. Please inspect the stored product regularly to ensure it is in a usable state.
- Not intended for long-term outdoor use (more than two (2) hours), as UV exposure and/or heat for extended periods can degrade the product. For applications where extended use may be required, the Ultra-Drain Seal Plus® should be considered.

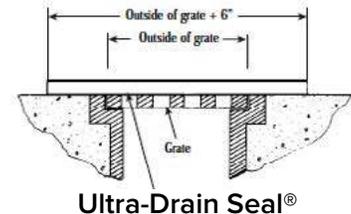

These chemicals are compatible for use with Ultra-Drain Seal:

Acetone*	(Med. Conc.)
Aluminum Salts	Hydrogen Peroxide
Ammonia	Kerosene
Barium Salts	Methyl Alcohol
Benzyl Alcohol	Methyl Ethyl Ketone*
Boric Acid Sol.	(MEK)
Butane	Methylene Chloride*
Butanol	Naphtha
Calcium Salts	Nitrogen Oxides
Carbon Dioxide	Oil, Mineral
Chloroform*	Phenol
Chloroethane	Sodium
Copper Salts	Sulfuric Acid
Cyclohexanone	(Med. Conc.)
Formaldehyde	Tetrahydrofuran (THF)
Freon	Toluene
Gasoline	Trichloroethylene*
Glycol Ether	Triethylamine
Hydrochloric Acid	Tropylene Glycol
(Med. Conc.)	Turpentine
Hydrofluoric Acid	Water

* Will cause the Ultra-Drain Seal™ to swell temporarily but not degrade.



Ultra-Drain Seal helps seal off drains to minimize problems!