



**ULTRATECH**  
INTERNATIONAL, INC

ULTRA-  
**DRAIN GUARD**

THE ORIGINAL CATCH BASIN INSERT

## Ultra-Drain Guard®

### Installation and Maintenance Instructions

Part# 9217 / 9218 / 9356

Oil & Sediment Model

Part# 9376 / 9377

Ultimate Model

Part# 9293

Oil & Sediment Model, High Capacity

Part# 9378 / 9379

Recycled Model

Part# 9219 / 9220 / 9358

Oil & Sediment Plus Model

Part# 9397


Heavy Metal Model

#### Installation:

1. Remove catch basin grating.
2. Clean dirt and debris from grating ledge
3. Insert Drain Guard. If using the Ultra-Drain Guard High Capacity Model, Part# 9393, Ultra-Drain Guard Retainers must be used – see below for installation instructions
4. Reinstall grate. To insure maximum effectiveness, Drain Guard skirt should be secured (pinched) between grating and ledge.
5. Cut the excess fabric off with a blade or knife if desired.

#### Installation with optional Ultra-Drain Guard Retainers (Part# 9237 / 9238):

- Follow steps 1 and 2 above. Insert Retainer through handling straps of Drain Guard. (Each Retainer should be holding two straps).
- Insert Drain Guard, placing Retainers across basin opening so that flat plates lay on grating ledge.
- Follow steps 4 and 5 above.

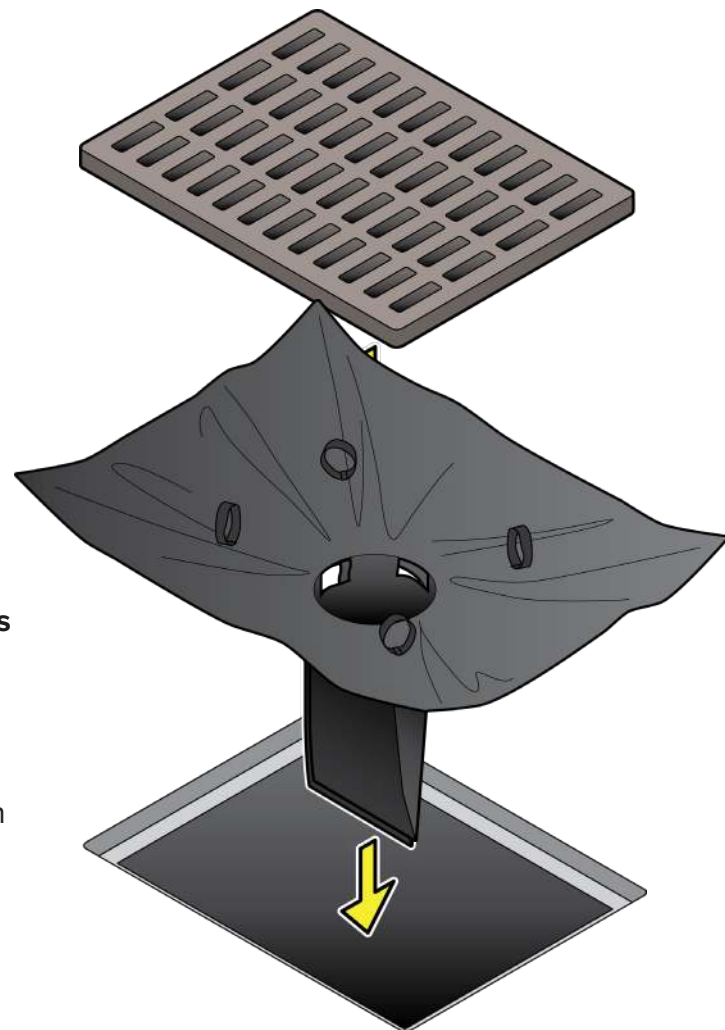



**ULTRATECH**  
INTERNATIONAL, INC

ULTRA-  
**DRAIN GUARD**  
THE ORIGINAL CATCH BASIN INSERT

### **Maintenance and Disposal:**

1. The Ultra-Drain Guard filters are designed to be used for 3 to 6 months under normal conditions. Where heavy contamination is present the unit will have a reduced life expectancy. When the unit has collected about 6 inches of sediment it is recommended that it be replaced. The unit should also be replaced if free oil can be seen floating and is not being absorbed. The Ultra-Drain Guards should be inspected on a regular basis.
2. Dispose of unit in accordance with applicable Federal, state and local environmental laws and regulations. The user is solely responsible for compliance with maintenance and disposal laws and regulations. The manufacturer or seller assumes no responsibility for proper or improper maintenance or disposal.
3. Part# 9393 (High Capacity model) is equipped with two lifting straps to facilitate in removal of the Ultra-Drain Guard using a forklift or other lifting device, as this model can hold up to 300 lbs. of sediment.