



ULTRATECH
INTERNATIONAL, INC.


ULTRA-
DRAIN GUARD

THE ORIGINAL CATCH BASIN INSERT

Ultra-Drain Guard® Reusable Model Installation and Removal Instructions

Installation:

1. Remove catch basin grating. (NOTE: Always wear proper protective equipment: steel-toed shoes, gloves, etc.)
2. Install Drain Guard in catch basin, making sure pockets are laid flat.
3. Replace grating.
4. Properly installed, Drain Guard is out of sight and catches silt without the worry of silt fences or straw bales failing.

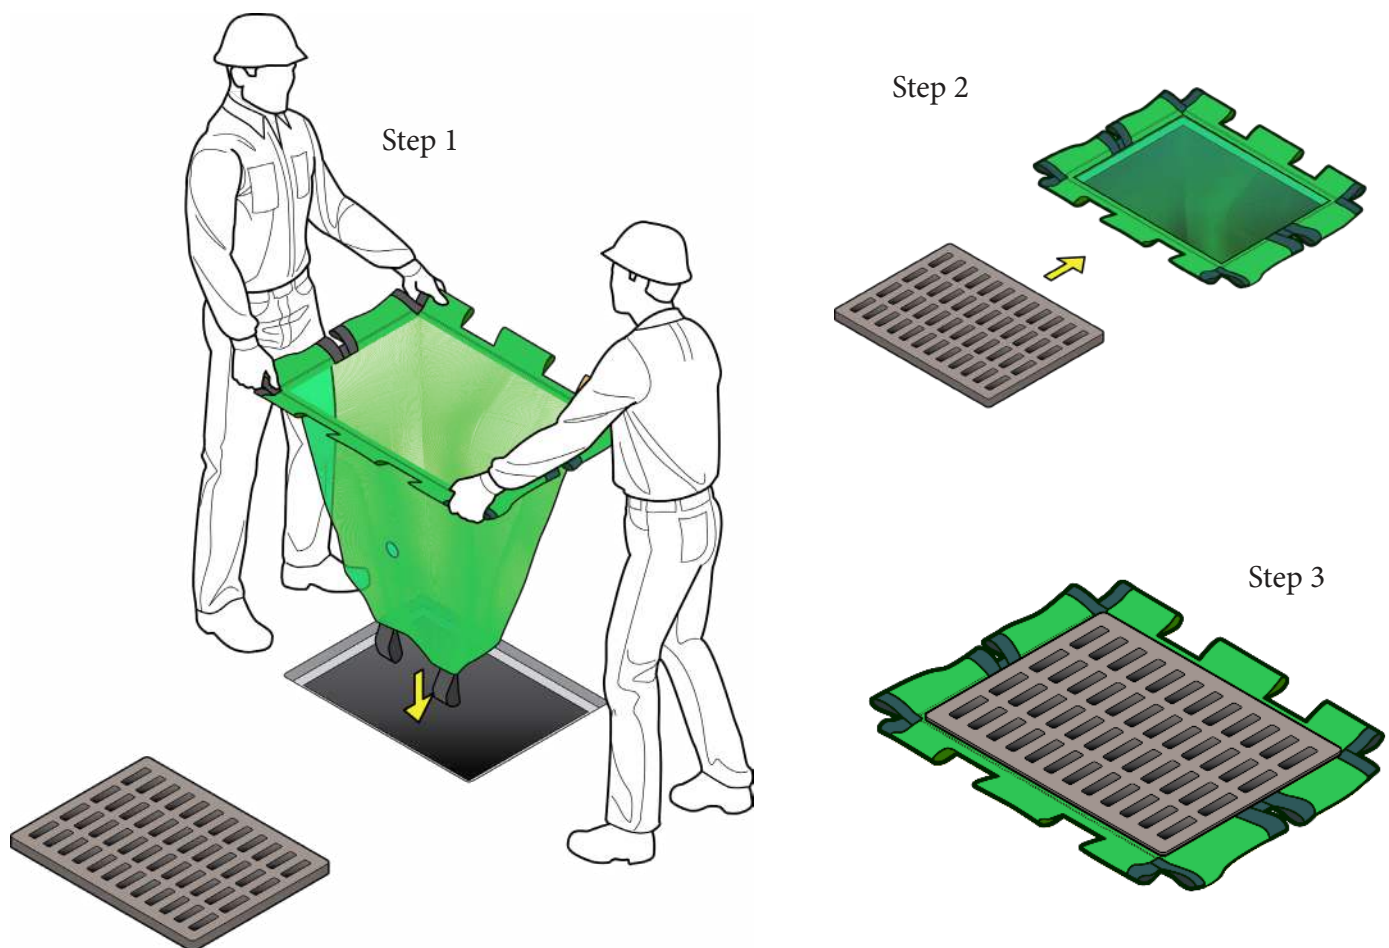

*See other side for
removal instructions.*



ULTRATECH
INTERNATIONAL, INC.

ULTRA-
DRAIN GUARD

THE ORIGINAL CATCH BASIN INSERT

Removal:

1. To prepare for emptying Drain Guard, remove any soil/aggregate covering removal flap pockets and insert rebar (not included) through pockets.
2. Remove catch basin grating.
3. Remove Drain Guard from catch basin by attaching to both bars and lifting with available equipment.
4. Move filled Drain Guard to dumping area and place on the ground.
5. Insert a lifting bar through both emptying straps.
6. Lift Drain Guard by emptying straps, which are attached to the bottom of the bag. When raised by the straps, bag will turn inside-out and empty.

