



ULTRATECH
INTERNATIONAL, INC.

Ultra-Trench Filter Boom

Part #9703


Instructions For Use

The Ultra-Trench Filter Boom is designed to remove hydrocarbons from stormwater runoff. Please follow the instructions below for best results.



Step 1: Remove the Ultra-Trench Filter Boom from the shipping box and insert a length of rebar (or material of similar size and weight) into the center hole of the boom.* The rebar is not required but helps keep the Ultra-Trench Filter Boom from moving around in adverse weather conditions such as wind and heavy rain.

Step 2: Place the Ultra-Trench Filter Boom in front of the trench drain to intercept the stormwater flowing into the trench to filter and remove hydrocarbons. Compression due to heavy vehicles driving over the Ultra-Trench Filter Boom will not adversely affect the performance of the boom.


Step 3: While each site has different rainfall events, amounts of hydrocarbons and other variables, we suggest, at a minimum, to rotate the Ultra-Trench Filter Boom $\frac{1}{3}$ of a turn every month in order to provide even distribution of accumulated hydrocarbons. The Ultra-Trench Filter Boom should be replaced each quarter or more frequently if there are significant amounts of hydrocarbons in the stormwater runoff. Periodic inspections are highly recommended.

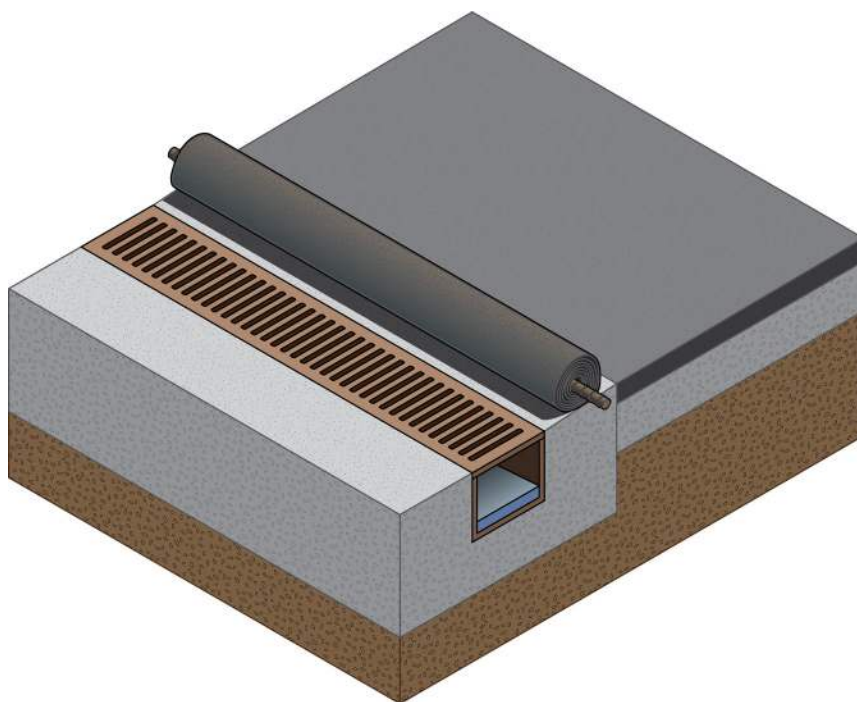

**NOTE: Rebar is not included.*



ROTATE

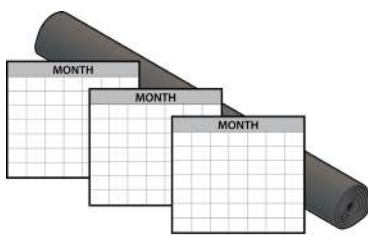

REPLACE

Step 4: Dispose of used Ultra-Trench Filter Booms according to local, state or federal regulations. The rebar may be removed from the center of the boom and used on a new Ultra-Trench Filter Boom.

* NOTE: the rebar is not included with this product.