



ULTRATECH
INTERNATIONAL, INC.

Ultra-Containment Berms®



SPCC

LEED

MADE IN
USA

Ultra-Containment Berm® Ultimate Model

Unique, "living hinge" design allows
hands-free drive in/drive out



7



6



2



5

Ultra-Containment Berm® Foam Wall Model

SPCC

LEED

VIDEO
ONLINE

Low-profile design is perfect for equipment maintenance and portable drum containment

- + Capture nuisance leaks and spills from vehicles, oily equipment, tanks and drums.
- + Low, 4" sidewall contains spills – keeps plant floors and soil free from contamination. (2" and 6" wall height also available)
- + Available in PVC (22 oz.), Copolymer 2000™ (28 oz.) and other rugged, chemical resistant materials.
- + No set-up required - simply unfold for quick deployment. Folded units require minimal storage space.
- + Meets SPCC and EPA Container Storage Regulations 40 CFR 264.175.
- + Custom sizes and sidewall height available.



8464

Part#	Dimensions ft. (m) Wall Height: 4 in. (102 mm)	Containment Capacity gal. (L)	Weight lbs. (kg)
8466	4 x 4 (1.2 x 1.2)	39 (148)	11.0 (5.0)
8467	6 x 6 (1.8 x 1.8)	67 (254)	19.8 (9.0)
8461	8 x 8 (2.4 x 2.4)	159 (602)	26.4 (12.0)
8470	10 x 10 (3.0 x 3.0)	249 (943)	35.3 (16.0)
8471	10 x 20 (3.0 x 6.1)	498 (1,885)	59.5 (27.0)
8477	12 x 30 (3.7 x 9.1)	897 (3,396)	120.0 (54.4)
8463	12 x 35 (3.7 x 10.7)	1,047 (3,963)	110.2 (50.0)
8464	12 x 50 (3.7 x 15.2)	1,496 (5,663)	149.9 (68.0)

8670 - All-In-One option (Includes pre-attached Ground Tarp and Track Belts) See website

Options: Ground Tarps, Track Belts, Pullover Covers, Self Bailer, Hose Stand



8465



Foam side walls temporarily compress when driven over.

Ultra-Containment Berm® Foam Wall Plus

SPCC

LEED

MADE IN
USA

VIDEO
ONLINE

Versatile spill containment berm uses replaceable foam supports to minimize service and maintenance time

- + Flexible containment berm uses foam supports for sidewall structure - allows for true "drive-in/drive-out" applications.
- + Removable supports are quickly and easily replaced if necessary - eliminates maintenance downtime.
- + Compact when folded (with supports removed) for more effective and more economical shipping and storage.
- + Heavy-duty materials withstand harsh conditions and chemical exposure.
- + Built-in handles help with transport and placement.
- + Meets SPCC and EPA Container Storage Regulation 40 CFR 264.175.
- + Custom sizes available.



Foam supports for sidewall structure are quickly and easily replaced.

Part#	Inside Dimensions ft. (m) Wall Height: 12 in. (305 mm)	Containment Capacity gal. (L)	Weight lbs. (kg)
8959	10 x 10 x 0.3 (3 x 3 x 0.1)	249 (943)	65 (29)
8963	12 x 20 x 0.3 (3.7 x 6.1 x 0.1)	598 (2,263)	220 (100)
8965	12 x 50 x 0.3 (3.7 x 15.2 x 0.1)	1,496 (5,663)	250 (113)

8670 - All-In-One option (Includes pre-attached Ground Tarp and Track Belts) See website

Options: Ground Tarps, Track Belts, Pullover Covers, Self Bailer, Hose Stand

Ultra-Containment Berm® Rapid-Rise Model



Sidewalls stay lowered and out of the way until they are needed


- + Sidewalls remain down during normal operations, loading and unloading — minimizing trip hazards.
- + Vehicles and equipment can drive in and out from any angle, with no sidewall set-up or take-down required.
- + In the case of a spill, the foam ring around the top perimeter of the Containment Berm rises with the level of spilled liquid.
- + Built-in struts around the perimeter of the Berm provide additional support when the liquid level is high.
- + Available in PVC (22 oz.), Copolymer 2000™ (28 oz.) and other rugged, chemical resistant materials.
- + **Meets SPCC and EPA Container Storage Regulation 40 CFR 264.175.**
- + Custom sizes available.



Copolymer 2000™ Part#	PVC 22 oz. Part#	Inside Dims ft. (m) Wall Height: 12 in. (305 mm)	Containment Cap. gal. (L)	Copolymer 2000™ Weight lbs. (kg)	PVC 22 oz. Weight lbs. (kg)
8430	8654	4 x 6 (1.2 x 1.8)	179 (678)	29 (13.2)	24.0 (11.0)
8431	8630	6 x 6 (1.8 x 1.8)	269 (1,018)	35 (15.9)	30.0 (14.0)
8432	8631	10 x 10 (3.0 x 3.0)	748 (2,831)	63 (28.6)	57 (25.9)
8710	8655	12 x 12 (3.7 x 3.7)	1,077 (4,077)	85.0 (39.0)	66.0 (30.0)
8437	8656	12 x 26 (3.7 x 7.9)	2,333 (8,831)	149 (67.6)	118.0 (54.0)
8711	8632	12 x 30 (3.7 x 9.1)	2,692 (10,190)	171.0 (78.0)	210 (95.3)

8670 - All-In-One option (Includes pre-attached Ground Tarp and Track Belts) See website

Options: Ground Tarps, Track Belts, Pullover Covers, Self Bailer, Hose Stand

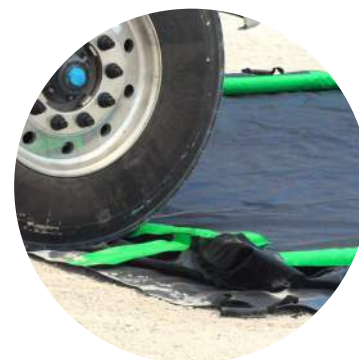

Ultra-Containment Berm® Collapsible Wall Model



Economical design sets up quickly — provides secure containment


- + The Collapsible Wall Model Containment Berm features rugged PVC sidewall assemblies for sidewall support. Simply swivel the “feet” of the PVC supports to lower or raise the sidewalls in just seconds!
- + Economical containment for drums, frac tanks, IBCs and many other containers.
- + Standard material of construction is Copolymer 2000™ (28 oz.). Other rugged, chemical resistant materials available.
- + **Meets SPCC and EPA Container Storage Regulations 40 CFR 264.175.**
- + Custom sizes available.



Part#	Inside Dimensions ft. (m)	Containment Capacity gal (L)	Weight lbs. (kg)
8405	4 x 6 (1.2 x 1.8)	179 (677.6)	43.0 (19.5)
8403	6 x 6 (1.8 x 1.8)	269 (1,018.3)	46.0 (20.9)
8400	10 x 10 (3.0 x 3.0)	748 (2,831.5)	70.0 (31.8)
8550	10 x 20 (3.0 x 6.0)	1,496 (5,663)	96.0 (43.5)

8670 - All-In-One option (Includes pre-attached Ground Tarp and Track Belts) See website

Options: Ground Tarps, Track Belts, Pullover Covers, Self Bailer, Hose Stand



Ultra-Containment Berm[®] Ultimate Model



Unique, “living hinge” design allows hands-free drive in/drive out — no need to manually raise or lower the endwalls

- + Entry and exit walls are supported every 12” with a patented “living hinge”.
- + Once a vehicle has entered or exited, the walls automatically spring back to their vertical position.
- + Both long sidewalls are held upright by PVC sidewall assemblies. Simply swivel the feet to lower the sidewalls for storage or transport to another location.
- + Drive-in/drive-out endwalls teamed up with collapsible sidewalls offer the ultimate combination — “Hands Free” convenience and an affordable design!
- + Standard material of construction is Copolymer 2000™ (28 oz.). Other rugged, chemical resistant materials available.
- + **Meets SPCC and EPA Container Storage Regulation 40 CFR 264.175.**
- + **Custom sizes available.**



PVC sidewall assembly



Two-way “living hinge” allows convenient, hands-free drive in/drive out.



8507

Part#	Inside Dimensions ft. (m) Wall Height: 12 in. (305 mm)	Containment Capacity gal. (L)	Weight lbs. (kg)
8500	4 x 6 (1.2 x 1.8)	179 (677)	72.0 (32.7)
8501	10 x 10 (3.0 x 3.0)	748 (2,831)	176.0 (79.8)
8502	12 x 26 (3.7 x 7.9)	2,333 (8,831)	189.0 (85.7)
8509	12 x 36 (3.7 x 11)	3,231 (12,230)	283.0 (128.4)
8505	12 x 60 (3.7 x 18.3)	5,385 (20,384)	297.0 (134.5)
8508	14 x 54 (4.3 x 16.5)	5,655 (21,406)	368.0 (166.9)
8510	14 x 56 (4.3 x 17.1)	5,864 (22,197)	408.0 (185.1)
8506	15 x 50 (4.6 x 15.2)	5,610 (21,236)	326.0 (147.9)
8507	15 x 66 (4.6 x 20.1)	7,405 (28,031)	405.0 (183.7)
8670 - All-In-One option (Includes pre-attached Ground Tarp and Track Belts) See website			
Options: Ground Tarps, Track Belts, Pullover Covers, Self Bailer, Hose Stand			


Ultra-Containment Berm[®] Modular Model (Gorilla Berm)



Versatile spill containment that can be reused and easily modified

- + Modular construction allows containment areas of any size to be configured.
- + Polymer-coated foam support blocks (6' lengths) provide structure to sidewalls - can be driven over repeatedly without damage.
- + Standard material is a 22 oz., anti-skid, coated vinyl fabric.
- + Triangular-shaped, polymer-coated foam support blocks (72”L x 16”W x 6”H) are used with rebar (not included) to provide sidewall structure.
- + Molded-in channels in top of foam blocks hold rebar - secures material in place.
- + **EPA 40 CFR 264.175 Containment of Containers Containing Free Liquid.**
- + **SPCC - Spill Prevention, Control and Countermeasure Act**

Corner block

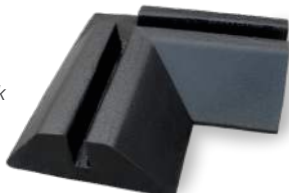

Part#	Inside Dimensions ft. (m) Wall Height: 6 in. (152 mm)	Number of Straight Modular Walls (4 Corners Included)	Containment Capacity gal. (L)	Weight lbs. (kg)
8740	7 x 13 (2.1 x 4.0)	6	366 (1,385)	190 (86.2)
8741	13 x 13 (4.0 x 4.0)	8	665 (2,517)	246 (111.6)
8742	13 x 25 (4.0 x 7.6)	12	1,263 (4,781)	359 (162.8)
8743	13 x 31 (4.0 x 9.4)	14	1,563 (5,917)	415 (188.2)
8744	13 x 43 (4.0 x 13.1)	18	2,161 (8,180)	523 (237.2)
8745	13 x 55 (4.0 x 16.8)	22	2,759 (10,444)	640 (290.3)
8746	13 x 61 (4.0 x 18.6)	24	3,059 (11,580)	695 (315.2)
8747	25 x 55 (7.6 x 16.8)	26	5,243 (19,847)	838 (380.1)
8748	31 x 55 (9.4 x 16.8)	28	6,485 (24,548)	935 (424.1)
8749	55 x 55 (16.8 x 16.8)	36	11,452 (43,351)	1028 (466.3)
Rebar not included - 1" diameter recommended				

Ultra-Containment Berm® Economy PE Model



Lightweight and economical L-bracket berm design provides secure spill containment

- + L-shaped wire brackets provide sturdy sidewall support.
- + 12" sidewall contains spills in drilling and fracking locations.
- + Compact when folded (with brackets removed) for more effective and more economical shipping and storage.
- + Two-color (black/yellow) material makes tears and punctures easier to identify - simply look for the opposite color.
- + Other standard sizes available.
- + Helps meet SPCC and EPA Container Storage Regulation 40 CFR 264.175 Spill Containment Regulations.



Part#	Inside Dimensions ft. (m) Wall Height: 12 in. (305 mm)	Containment Capacity gal. (L)	Weight lbs. (kg)
8240	6 x 6 (1.9 x 1.9)	269 (1,018)	21.0 (9.5)
8241	10 x 10 (3.05 x 3.05)	748 (2,831)	25.0 (11.3)
8242	12 x 12 (3.65 x 3.65)	1,077 (4,077)	29.0 (13.1)
8243	12 x 25 (3.65 x 7.62)	2,244 (8,494)	60.0 (27.4)
8244	10 x 50 (3.65 x 15.24)	3,740 (14,157)	81.0 (36.7)
8245	12 x 50 (3.65 x 15.24)	4,488 (16,989)	88.0 (39.9)

Options: Ground Tarps, Pullover Covers, Self Bailer, Hose Stand

Ultra-Containment Berm® Economy Model




Economical design offers cost savings and secure containment

- + L-shaped aluminum brackets provide sturdy sidewall support.
- + Easy assembly – Brackets are quickly and easily inserted into sleeves.
- + Standard material of construction is Copolymer 2000™ (28 oz.).
- + No frames, components or excess material outside of sidewalls – excellent for use inside structures where floor space is a premium.
- + Meets SPCC and EPA Container Storage Regulations 40 CFR 264.175.
- + Custom sizes and other construction materials available.



Part#	Inside Dimensions ft. (m) Wall Height: 12 in. (305 mm)	Containment Capacity gal. (L)	Weight lbs. (kg)
8250	4 x 6 (1.2 x 1.8)	179 (678)	21.0 (9.5)
8251	6 x 6 (1.8 x 1.8)	269 (1,018)	26.0 (12.0)
8252	10 x 10 (3 x 3)	748 (2,831)	52.0 (23.5)
8253	12 x 60 (3.7 x 18.3)	5,385 (20,384)	268.0 (121.5)
8254	15 x 50 (4.6 x 15.2)	5,610 (21,234)	259.0 (117.5)
8255	15 x 66 (4.6 x 20.1)	7,405 (28,028)	334.0 (151.5)

Options: Ground Tarps, Pullover Covers, Self Bailer, Hose Stand



Compact shipping and storage – with frames removed, (6' x 6' unit shown).

Ultra-Containment Berm® Compact Model



Compact design folds into a tight package - minimal space required to store onboard trucks and hazmat response vehicles

- + Compact, lightweight, portable design – no inflation required.
- + Standard material of construction is Copolymer 2000™ (28 oz.). Other rugged, chemical resistant materials available.
- + Sidewalls lower quickly to allow drive in/drive out.
- + **Meets SPCC and EPA Container Storage Regulation 40 CFR 264.175.**
- + **Additional standard and custom sizes available.**

Patents: See www.ultratechpatents.com

Part#	Inside Dimensions ft. (m) Wall Height: 12 in. (305 mm)	Containment Capacity gal. (L)	Weight lbs. (kg)
8609	4 x 6 (1.2 x 1.8)	179 (678)	34 (15.4)
8610	6 x 6 (1.8 x 1.8)	269 (1,018)	39 (17.7)
8611	10 x 10 (3.0 x 3.0)	748 (2,831)	72 (32.7)
8612	12 x 60 (3.7 x 18.3)	5,385 (20,384)	335 (152)
8613	15 x 50 (4.6 x 15.2)	5,610 (21,234)	317 (143.8)
8614	15 x 66 (4.6 x 20.1)	7,405 (28,028)	404 (183.3)
8670 - All-In-One option (Includes pre-attached Ground Tarp and Track Belts) See website			

Options: Ground Tarps, Track Belts, Pullover Covers, Self Bailer, Hose Stand



Sidewall struts are easily inserted and removed from their sleeves.

Once sidewalls are lowered, vehicles and heavy equipment can drive in or out.

Ultra-Containment Wall® M2



Modular, hard-walled system provides long-term, high-capacity spill containment

- + Modular wall sections and corners can be easily assembled to form almost any size/shape spill containment area needed.
- + Heavy-duty, 30 mil, textured polyethylene liner provides rugged, impermeable barrier to capture leaks and spills.
- + Creates large, semi-permanent containment areas. Provides much more gallon capacity than shorter walled containment systems.
- + Versatile system can be easily disassembled for reuse at future sites.
- + Made in the USA. Stock/warehousing: Texas.
- + **Meets SPCC, EPA Container Storage Regulation 40 CFR 264.175.**



Part#	Wall Height & Description	Dimensions in. (mm)	Weight lbs. (kg)
8896	1 ft. (0.3 m) - Straight Section	Assembled: 81.25 x 18 x 12 (2,064 x 457 x 305)	34.0 (15.4)
8897	1 ft. (0.3 m) - Corner Section	36.8 x 36.8 x 12 (934 x 934 x 305)	12.0 (5.4)
8880	2 ft. (0.6 m) - Straight Section	Assembled: 81.25 x 24 x 24 (2,064 x 610 x 610)	65.0 (29.5)
8881	2 ft. (0.6 m) - Corner Section	36.8 x 19 x 24 (934 x 484 x 610)	19.0 (8.6)
8883	3 ft. (0.9 m) - Straight Section	Assembled: 81.25 x 24 x 36 (2,064 x 610 x 914)	76.0 (34.5)
8884	3 ft. (0.9 m) - Corner Section	36.8 x 19 x 36 (934 x 484 x 914)	25.0 (11.3)
8770	30 mil Textured Polyethylene Liner	Varies	1.25 (0.57)/sq. yd.

Complete Systems:

Part#	Wall Height	Dimensions ft. (m)	Item Quantity	Containment Cap. gal. (L)	Weight lbs. (kg)
8898	1 ft. (0.3 m)	15 x 55.7 x 1 (4.6 x 16.8 x 0.3)	20-Straight, 4-Corners	6,211 (23,511)	728.0 (330.0)
8882	2 ft. (0.6 m)	15 x 55.7 x 2 (4.6 x 17 x 0.6)	20-Straight, 4-Corners	12,421 (47,019)	1,376.0 (624.0)
8885	3 ft. (0.9 m)	15 x 55.7 x 3 (4.6 x 17 x 0.9)	20-Straight, 4-Corners	18,632 (70,530)	3,007.5 (1,364.2)

Ultra-Containment Berm® Foam Wall XC Model



Versatile spill containment berm designed for use in extreme cold

- + Capture nuisance leaks and spills from vehicles, oily equipment, tanks and drums.
- + Material of construction: 22 oz. (31 mil) EVA - Designed specifically for use in extreme cold temperatures.
- + Soft foam sidewall compresses for convenient loading and off-loading.
- + No set-up required - simply unfold for quick deployment. Folded units require minimal storage space.
- + Built-in handles (18" long, polyester) help with transport, placement and storage.



Part#	Inside Dimensions ft. (m)	Containment Capacity gal (L)	Weight lbs. (kg)
8980	2 x 2 (.6 x .6)	9 (34)	6.0 (2.7)
8981	2 x 4 (.6 x 1.2)	19 (72)	8.0 (3.6)
8982	3 x 3 (.9 x .9)	22 (83)	8.0 (3.6)
8983	4 x 4 (1.22 x 1.22)	39 (147.63)	11.0 (5.0)
8984	4 x 6 (1.22 x 1.83)	59 (223.34)	15.0 (6.80)
8985	5 x 5 (1.52 x 1.52)	62 (234.70)	15.0 (6.80)
8986	6 x 6 (1.83 x 1.83)	89 (337.0)	19.0 (8.62)

Ultra-Containment Berm® Mini Foam Wall Model



Quick and convenient spill containment for vehicles, equipment and containers

- + Foldable mini berms (duck ponds) are compact and easy to store but deploy in a moment's notice to respond to a spill.
- + Foam sidewalls (6"H) provide support but can be driven over/stepped on for easier equipment/vehicle placement.
- + Heavy-duty 22 oz. PVC construction provides excellent chemical compatibility.



Part#	Material of Construction	Inside Dimensions ft. (m) Wall Height: 6 in. (152 mm) Wall Thickness: 2 in. (51 mm)	Containment Capacity gal (L)	Weight lbs. (kg)
8850	22 oz. PVC	2 x 2 (0.6 x 0.6)	15 (57)	3.0 (1.5)
8845	22 oz. PVC	3 x 3 (0.9 x 0.9)	33 (125)	5.0 (2.27)
8852	22 oz. PVC	4 x 4 (1.2 x 1.2)	60 (227)	7.0 (3.0)
8854	22 oz. PVC	4 x 6 (1.2 x 1.8)	75 (284)	9.0 (4.0)
8846	22 oz. PVC	5 x 5 (1.5 x 1.5)	93.5 (354)	9.0 (4.1)
8847	22 oz. PVC	6 x 6 (1.8 x 1.8)	135 (509)	12.0 (5.44)

Ultra-Berm Builder®



Custom containment for static equipment

- + Component system provides flexibility to create a semi-permanent, high-visibility custom barrier.
- + Durable, vinyl covering resists oils, coolants and most chemicals.
- + Cut to length and secure to floor with included sealant, then seal seams with the vinyl adhesive.
- + Economical containment for leaks and spills around machinery and equipment - no need to build expensive cement or angle iron curbs.
- + High-visibility yellow color draws attention to barrier for increased safety.
- + Available in 2, 4 and 6-inch heights.
- + **Meets SPCC and EPA Container Storage Regulations 40 CFR 264.175.**



Part#	Description	Dimensions	Qty/Box	Weight lbs. (kg)
8640	Full Kit, 2-inch	50' x 5.50" x 2" (15.2m x 140mm x 51mm)	1/box	21.0 (9.5)
8641	Straight Section, 2-inch	15' x 5.50" x 2" (4.6m x 140mm x 51mm)	1/box	6.0 (3.0)
8642	Corner, 2-inch	7.25" x 5.50" x 2" (184mm x 140mm x 51mm)	2/box	2.0 (1.0)
8644	Floor Sealant (10.3 fl. oz. tube)	—	6/box	8.0 (3.5)
8645	Vinyl Adhesive (8 oz. can)	—	1/box	1.0 (0.5)

Other Standard Sizes Available. Please visit our website for more information.

Ultra-Berm Builder® Plus Model



Drive-over barrier provide heavy-duty custom containment

- + Create permanent containment on concrete, asphalt and most sealed areas.
- + Heavy-duty, 40-ounce, vinyl-coated fabric can withstand traffic from trucks, forklifts and other vehicles.
- + Open-cell foam core compresses to approximately 1/4" when driven over and springs back to shape when vehicles pass.
- + Secures to the floor with sealant (not included) and is reinforced with pre drilled aluminum mounting strips (included) and steel anchors (included).
- + Available in 2, 4 and 6-inch heights.



Part#	Description	Dimensions in. (mm)	Quantity	Weight lbs. (kg)
8671	Straight Wall Section, 2-inch	150 x 5.5 x 2 (3,810 x 139.7 x 50.8)	1/box	11.50 (5.22)
8672	Corner, 2-inch	11 x 5.5 x 2 (279.4 x 139.7 x 50.8)	2/box	2.0 (0.9)
8673	Wall End, 2-inch	8 x 5.5 x 5 (203.2 x 139.7 x 127)	2/box	2.0 (0.9)

Other Standard Sizes Available. Please visit our website for more information.



11542 Davis Creek Court, Jacksonville, Florida 32256 USA
 1-904-292-1611 · 1-904-292-1325 fax
 spillcontainment.com · info@spillcontainment.com

